

# Hand Control H2Z

H2Z hand control is designed for home care and furniture applications which can work well with Moteck standard control boxes and double motors.






## Features

---

- Main applications: Home care, Furniture
- Max. motor number to control: 2
- Available number of buttons: 2, 4 or 6
- Joint movement for 2 motors
- Color: Black
- Operation indicator
- With hook for easy placement
- Cable length: Total 880mm long with 420mm spiral

# Dimensions

---

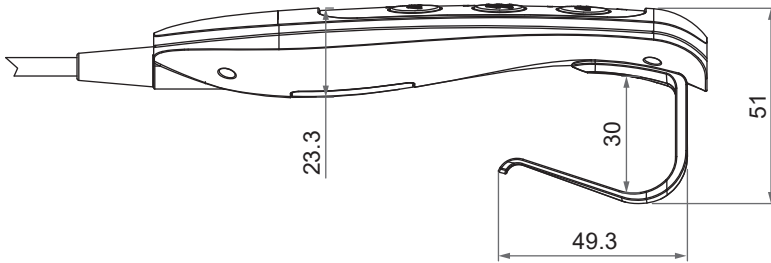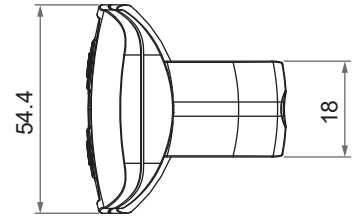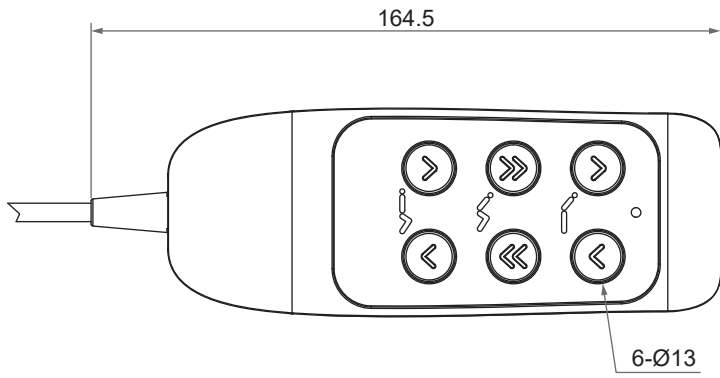



Unit: mm

# Standard Panel Artwork


## MotECK control category P1 without position memory function

### Panel artwork:

- Definition 1 (artwork A, B)

Code	A	B
Artwork		
	H2Z-02-1-00	H2Z-04-2-00


- Definition 2 (artwork C)

Code	C
Artwork	
	H2Z-06-2-01

### Button definition:


- Definition 1 (artwork A, B)

- ① Actuator #1 extends
- ② Actuator #1 retracts
- ③ Actuator #2 extends
- ④ Actuator #2 retracts



- Definition 2 (artwork C)

- ① Actuator #1 extends
- ② Actuator #1 retracts
- ③ Actuator #1 & #2 extend
- ④ Actuator #1 & #2 retract
- ⑤ Actuator #2 extends
- ⑥ Actuator #2 retracts



**Remark:** When releasing the button, actuator stops and LED indicator turns off immediately.

## Compatibility

Product	Compatible models	Compatible requirement
<b>Control box</b>	T-control, CBT2, CB3T, CS1	<ul style="list-style-type: none"><li>• Moteck control category P1 without position memory function</li><li>• With Moteck F-type DIN plug</li></ul>
	CF11H	<ul style="list-style-type: none"><li>• Moteck control category P1 without position memory function</li><li>• With Moteck E2-type RJ plug</li></ul>
	CF12H	<ul style="list-style-type: none"><li>• Moteck control category P1 without position memory function</li><li>• With Moteck E-type RJ plug</li></ul>
<b>Double motor</b>	TW41/TW61	<ul style="list-style-type: none"><li>• Moteck control category P1 without position memory function</li><li>• With Moteck A-type DIN plug</li></ul>

### Cable plug:



F-type plug



A-type plug



E-type plug



E2-type plug

## Ordering Key

H2Z- 04 - 2 - 00 - H30 - 0 B 0

<b>Button</b>	<b>02:</b> 2 buttons <b>04:</b> 4 buttons <b>06:</b> 6 buttons
<b>Number of motor</b>	<b>1:</b> 1 motor <b>2:</b> 2 motors
<b>Function</b>	<b>00:</b> Standard <b>01:</b> Joint movement
<b>Accessory</b>	<b>H30:</b> Hook (30mm)
<b>Reserved</b>	<b>0</b>
<b>Panel artwork code</b>	<b>A ~ C:</b> Refer to Standard Panel Artwork
<b>Reserved</b>	<b>0</b>

### Terms of Use

The user is responsible for application suitability of Moteck products. As ongoing improvement process continues, products listed on the Moteck website are subject to change without prior notice. Moteck reserves the right to terminate the sales or remove any product displayed on the website, or listed in its catalogues.