

# Power Adapter

## DPA-72-2430-C6

DPA-72-2430-C6 is an external power adapter that outputs 24V DC/3A. The AC input end of this product is 3pin (including the ground wire), which adopts IEC60320 C6 type socket, and the AC wire can be replaced.



### Features

---

**Main application: Furniture****Input:**

- Input voltage: 100V AC ~ 240V AC 60/50Hz
- Standby power consumption: <0.21W @ no load

**Output:**

- Output voltage: 24V DC
- Output current: 3A

**Protection function:**

- Output over current protection
- Output short circuit protection

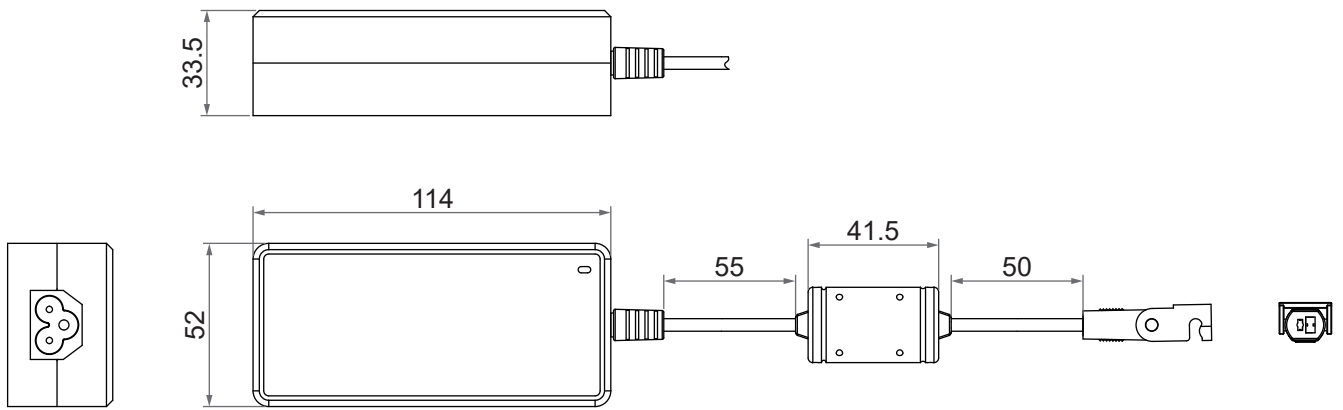
**Operating environment:**

- Operating ambient temperature: 0°C ~ +40°C
- Operating ambient humidity: 5% ~ 90% RH
- Storage temperature: -20°C ~ +60°C

**Others:**

- Color: Black
- Electric shock protection level: Class I
- AC Power cord length: 3000mm, US or CEE 7/7 EU AC plug


## Dimensions






Unit: mm

## Cable Plug

- Moteck S-type DIN 41529 female connector for DC output



- AC power cord

Plug type (plug in the wall)	Code	
	AC power cord length 3000mm straight	Connector type (plug in the power supply)
US 3-Pin plug 	<b>B3</b>	IEC 60320 C6 type connector 
CEE 7/7 EU 3-Pin plug 	<b>F3</b>	

## Ordering Key

	DPA - 72 - 24 - 30 - C6 - S - 54 - B - 3
Watts	72: 72W
Output voltage	24: 24V DC
Output current	30: 3.0A
AC inlet type	C6: Inlet 3-Pin power socket (IEC 60320 C6 type)
DC connector type	S: Moteck S-type 41529 female connector
Output over current protection	54: 5.4A
AC power plug	B: US 3-Pin plug F: CEE 7/7 EU 3-Pin plug
AC power cord length	3: 3000mm

### Terms of Use

The user is responsible for application suitability of Moteck products. As ongoing improvement process continues, products listed on the Moteck website are subject to change without prior notice. Moteck reserves the right to terminate the sales or remove any product displayed on the website, or listed in its catalogues.