

Power Adapter

DPA-87-2930-C6

DPA-87-2930-C6 (originally TSW3) is an external power adapter that outputs 29V DC/3A. The AC input end of this product is 3pin (including the ground wire), which adopts IEC60320 C6 type socket, and the AC wire can be replaced.



Features

Main application: Furniture**Input:**

- Input voltage: 100V AC ~ 240V AC 60/50Hz
- Standby power consumption: <0.5W @ no load

Output:

- Output voltage: 29V DC
- Output current: 3A

Protection function:

- Input over current protection
- Output over voltage protection
- Output over current protection
- Output short circuit protection
- Over load protection

Operating environment:

- Operating ambient temperature: 0°C ~ +40°C
- Operating ambient humidity: 20% ~ 90% RH
- Storage temperature: -20°C ~ +85°C
- Storage humidity: 20% ~ 90% RH

Others:


- Color: Black
- Electric shock protection level: Class I
- AC Power cord length: 3000mm, US or CEE 7/7 EU AC plug

Option:


- Fixing clips

Dimensions

- Single unit

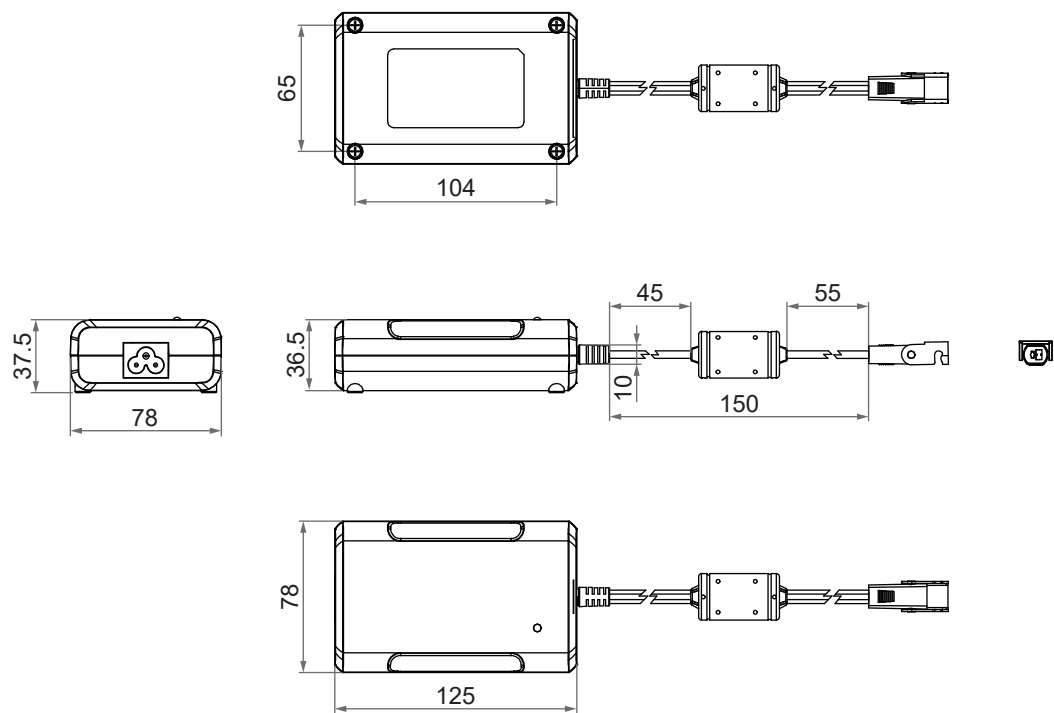


- Assembly with fixing clips

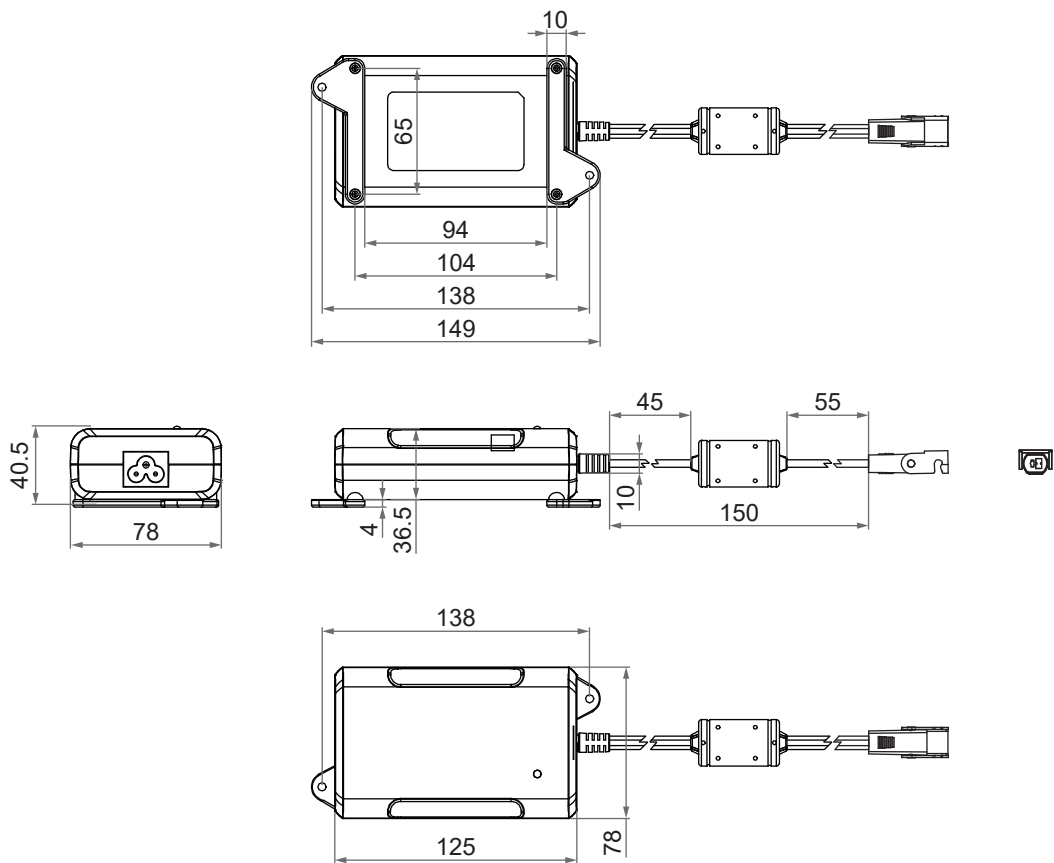

Unit: mm

Cable Plug




- Moteck S-type DIN 41529 female connector for DC output



- Moteck R-type DIN 41529 female connector for DC output



- AC power cord

Code		
Plug type (plug in the wall)	AC power cord length	Connector type (plug in the power supply)
	3000mm straight	
US 3-Pin plug 	B3	IEC 60320 C6 type connector 
CEE 7/7 EU 3-Pin plug 	F3	

Ordering Key

	DPA - 87 - 29 - 30 - C6 - S - 70 - B - 3 - F
Watts	87: 87W
Output voltage	29: 29V DC
Output current	30: 3.0A
AC inlet type	C6: Inlet 3-Pin power socket (IEC 60320 C6 type)
DC connector type	R: Moteck R-type 41529 female connector S: Moteck S-type 41529 female connector
Output over current protection	70: 7.0A
AC power plug	B: US 3-Pin plug F: CEE 7/7 EU 3-Pin plug
AC power cord length	3: 3000mm
Option	Blank: None F: Fixing clips