

Power Adapter

WPA-29-2910-NA

WPA-29-2910-NA (formerly TSW4) is a wall-plug type switching power adapter with an output of 29V DC/1A. The AC plug is CEE 7/16 EU 2-pin.



Features

Main applications: Furniture

Input:

- Input voltage: 100V AC ~ 240V AC 60/50Hz
- Standby power consumption: <0.5W @ no load

Output:

- Output voltage: 29V DC
- Output current: 1A

Protection function:

- Input over current protection
- Output over voltage protection
- Output over current protection
- Output short circuit protection
- Over load protection


Operating environment:

- Ambient operation temperature: 0°C ~ +40°C
- Ambient operation humidity: 20% ~ 90% RH
- Storage temperature: -20°C ~ +85°C
- Storage humidity: 20% ~ 90% RH

Others:

- Color: Greyish white
- Electric shock protection level: Class II
- DC Power cord length: 2800mm
- Certified: EN55014-1, EN55014-2, EN61000-3-2, EN61000-3-3

Dimensions

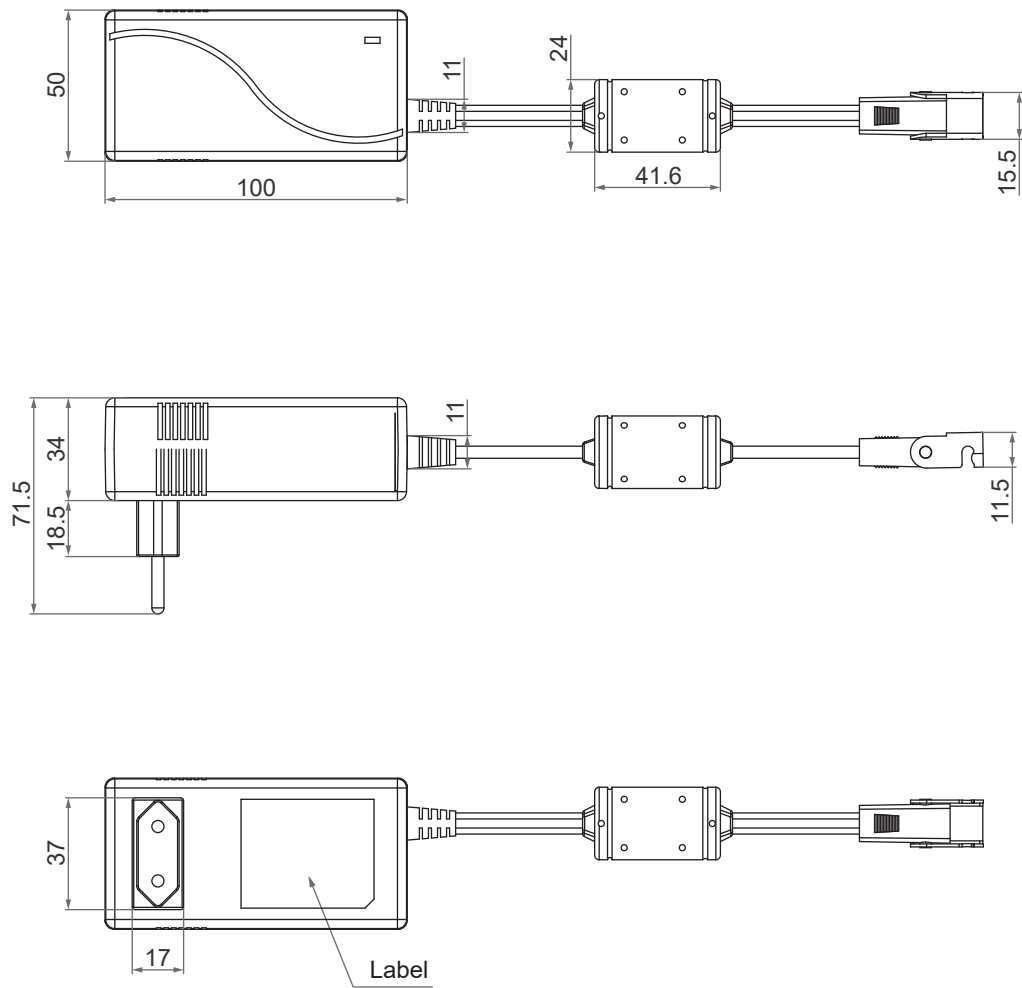

Unit: mm

Cable Plug

- Moteck S-type DIN 41529 female connector for DC output



Ordering Key

	WPA	29	29	10	NA	S	50	C	2
Watts	29: 29W								
Output voltage	29: 29V DC								
Output current	10: 1.0A								
AC inlet type	NA: Not available								
DC connector type	S: Moteck S-type DIN 41529 female connector								
Output over current protection	50: 5.0A								
AC power plug	C: CEE 7/16 EU 2-Pin plug								
DC power cord length	2: 2800mm								

Terms of Use

The user is responsible for application suitability of Moteck products. As ongoing improvement process continues, products listed on the Moteck website are subject to change without prior notice. Moteck reserves the right to terminate the sales or remove any product displayed on the website, or listed in its catalogues.