


Wireless Control **TXH**

TXH is an RF wireless control with optional position memory function, which can be used with TXA receiver for medical care and furniture applications.




Features and Options

- Main applications: Medical care, furniture
- Frequency: 2.4GHz
- Operating distance: 5m
- Max. motor number to control: 3 channels
- Available quantity of key: 2, 4, 6, 8 or 9
- Safety lock on the back
- IP Protection level: IP20
- With hook for easy placement (30mm gap)
- Battery: Alkaline AAA x 2
- LED indicator
- Color: Silver
- Button material: Silicone rubber
- Certified: CE marking, 2014/53/EU Radio Equipment (RED)
- Optional position memory function
- Optional 50mm hook gap

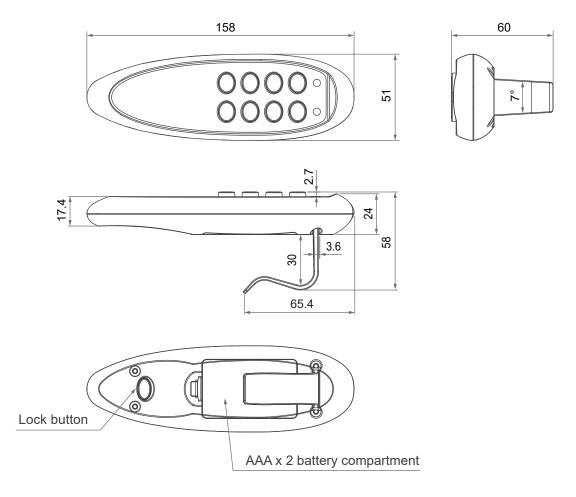


With 50mm hook gap




Standard Panel Artwork

TXH3 (without position memory function)

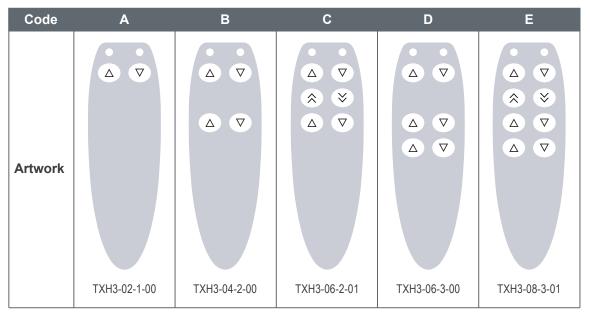


TXH4 (support position memory function)



Button definition:

- Artwork A, B, C, D, E

- Actuator #1 extends
- Actuator #1 retracts
- 3 Actuator #1 & #2 extend
- (4) Actuator #1 & #2 retract
 (5) Actuator #2 extends
- 6 Actuator #2 retracts
- 7) Actuator #3 extends
- (8) Actuator #3 retracts



- Artwork F

- ① Actuator #1 extends
- Actuator #1 retracts
- 3 Actuator #1 & #2 extend
- ④ Actuator #1 & #2 retract
- (5) Actuator #2 extends
- 6 Actuator #2 retracts
- ⑦ Memory position 1
- (8) Memory position 2(9) Memory Set



Compatibility

TXH3 (without position memory function)

Product	Model
RF receiver adapter	TXA4, TX2A

TXH4 (support position memory function)

Product	Model
RF receiver adapter	TXA5

	ТХН	3	- 8	- 3 -	01	H30 ·	Е
Model	3: TXH3 (without position memory function4: TXH4 (support position memory function)						
Button	 2: 2 buttons 4: 4 buttons 6: 6 buttons 8: 8 buttons 9: 9 buttons (for TXH4 only) 						I
Number of motor	1: 1 motor 2: 2 motors 3: 3 motors						
Function	00: Standard 01: Joint movement 04: Joint movement + memory function						
Accessory	H30 : 30mm hook gap (standard) H50 : 50mm hook gap						
Panel artwork code	A ~ F : Refer to paragraph of Standard I	^{>} anel /	Artwork				



Terms of Use The user is responsible for the suitability of MOTECK products, and the products listed on the MOTECK website are subject to change without notice. MOTECK reserves the right to terminate sales or delete any products displayed on the website or listed in its catalog.