

RF receiver adapter TXA

TXA is an RF 2.4GHz receiver, which can be connected to a compatible control box and paired with a remote control. It can operate the extend/retract of the actuator. It can be equipped with a control box with position memory function as required, which is suitable for furniture applications.




Features and Option

- Main applications: Furniture
- Input: 10 ~ 24V DC (TXA4) / 5V DC (TXA5)
- Frequency: 2.4GHz Radio-Frequency based receiver
- Operating distance: 5m
- Max. number of motors: 3 channels
- Support emergency "All Down" function
- Indoor use only
- Color: Black
- LED indicator
- Duty cycle: 10%, max. 2 min. continuous operation in 20 min.
- Certified: CE Marking, 2014/53/EU Radio Equipment Directive (RED)
- Optional cable length

Dimensions


- TXA

Unit: mm

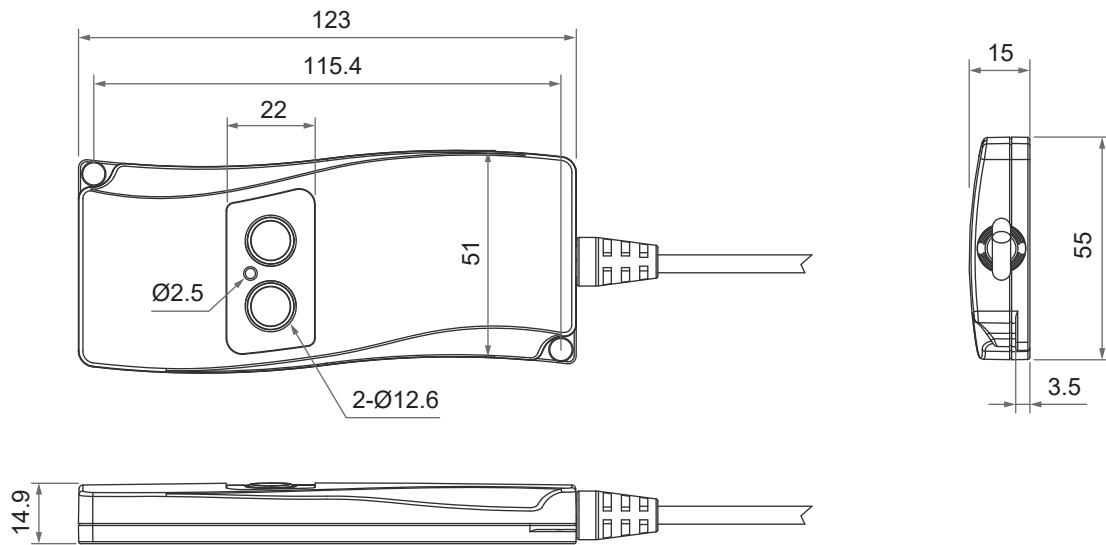


- Cable length



- Total 880mm long with 420mm spiral

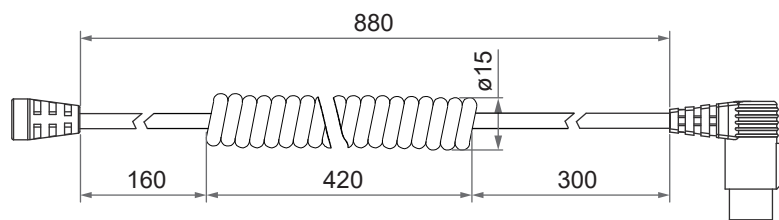


- 1000mm straight

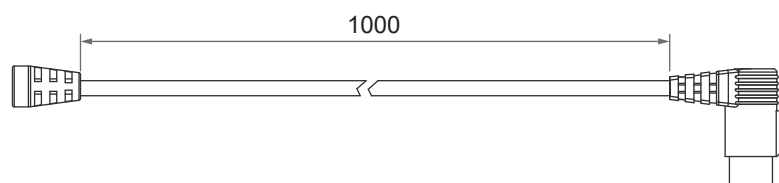

Standard Panel Artwork

Code	0	1
Function	Without position memory function	With position memory function
Artwork		

Button definition



No.	Definition	Operation
①	Learning	<p>1. Press and hold ①, if the LED indicator flashes, it means that enters the learning mode</p> <p>2. Press any key on the remote control to complete the pairing and learning.</p> <p>3. After entering the learning mode, the LED indicator flashes then turns off. If the control box does not enter the learning mode within 2 minutes, it will automatically leave the learning mode and the LED indicator turns off.</p>
②	Down	<p>Press and hold ②, all actuators are retracted.</p> <p>Press and hold the button, the actuator will move, release the button to stop moving.</p>



More information about usage is provided in TXA User Guide, which can be downloaded from Moteck website.

Compatibility

- TXA4 (without position memory function)


Product	Model	TXA4 spec
Control box	T-control, CS1, CS2, CB3T, CB4M, CBT2	- Moteck P1 control category, without position memory function - Moteck F-type DIN plug
Wireless control	TX2T, TXC, TXH3, TXT, TXZ	- 2.4GHz

- TXA5 (support position memory function)

Product	Model	TXA5 spec
Double motor	TW61	- Moteck S1 control category, support position memory function - Moteck A-type DIN plug
Wireless control	TXH4, TXT, TX2T	- 2.4GHz


- Cable plug

- Moteck P1 control category, without position memory function



7-pin plug

- Moteck S1 control category, support position memory function



5-pin plug



F-type



A-type

Ordering Key

		TXA 4 - 2 0 - 0 0 0 8						
Buttons	4 : Without position memory function 5 : Supports position memory function							
Number of actuator	1 : 1 actuator 2 : 2 actuators 3 : 3 actuators (for TXA4 only)							
Control	0 : Control box 1 : Double motor							
Panel artwork	0 : Without position memory function 1 : With position memory function (Please refer to Standard Panel Artwork)							
Reserved	0							
Reserved	0							
Cable length	8 : 880mm in length with 420mm spiral 1 : 1000mm straight							

Terms of Use

The user is responsible for application suitability of Moteck products. As ongoing improvement process continues, products listed on the Moteck website are subject to change without prior notice. Moteck reserves the right to terminate the sales or remove any product displayed on the website, or listed in its catalogues.